SURTECO

univerSOL

EDGEBANDING RELEASE AGENT

SURTECO univerSOL applies a thin and barely visible separating film which prevents the adhesion of hot melt residues on surfaces, machinery, and tooling

- Delivers a proper release without leaving behind any residues that needs further cleaning - one product is enough
- SURTECO univerSOL simplifies and replaces several other agents used in the edge banding spray systems
- · The formulation is non-flammable and nonhazardous
- Promotes high quality finishes, prevents marks and friction from occurring on the edge/foil
- · Suited for spraying systems on leading edge banding machines






SURTECO North America

800-461-0061 | info@na.surteco.com |na.doellken.com



PRODUCT INFORMATION

ARRANGEMENT OF SURTECO univerSOL ON THE EDGE BANDING MACHINE SPRAYING SYSTEMS

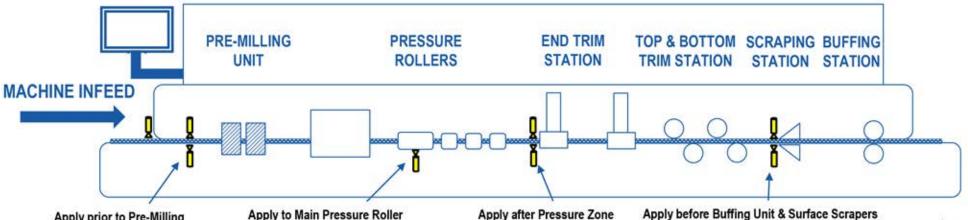

BENEFITS

Apply prior to Pre-Milling

consumption

Prevents the adhesion of emerging glue onto the workpiece

PRODUCT FEATURES

Tooling remains free of glue residue Extends equipment longevity Prevents markings and friction

Prevents glue residues from adhering to rolls, transport tracks, and plastic surfaces

Apply after Pressure Zone

Tooling remains free of glue residue & chips

Removal of loose glue residues

PACKAGING

- · 20 kg pail (US010-20)
- 190 kg drum (US010-190)
- 1 kg sample (US010-01)

SHELF LIFE

12 months

Nonflammable & Nonhazardous	Minimization of transportation costs; safer to handle & storage made easier
Versatile; 1 product is sufficient	Reduces inventory complexity and costs by eliminating several different products
Prevents glue residues when applied to panel surfaces and tooling	Reduces production downtime due to cleaning and maintains production equipment
Listed in OEM manuals	Supports OEM warranties
Silicone-free	Does not leave a residue that affects post treatment, such as staining and varnishing
Can be diluted with water; Economical in	_

Saves on material costs

HOW TO USE

- Pour SURTECO univerSOL into the appropriate storage tanks on edge band machine
- · Can be applied at the various points of application, depending on the configuration of the edge bander spray system
- · Apply continuously and in a certain rhythm - depending on the degree of soiling